

NOISE INSULATION SONODAMP DOOR / WINDOW



Product description The noise insulating sonodamp door is made of galvanised Sendzimir steel plate. The sonodamp door is suitable both for indoor and outdoor applications.


The noise-insulated window is made of galvanised Sendzimir steel plate.

Properties



- High noise insulation and sound absorption
- The Sonodamp doors and windows are applicable for a wall panel thickness of 60 mm up to and including 100 mm
- Noise insulating Sonodamp door, dimensions W 949 x H 2140 x D 50 mm
- Recess dimension W 980 x H 2185 mm (door with window W 970 x H 2195 mm)
- Fitted with:
 - Built-in frame with single rubber seal; flange width 60 mm, complete with hole pattern \varnothing 6.5 mm, centre-to-centre approx. 300 mm
 - Closed indoor and outdoor plate, 1.5 mm Sendzimir galvanised steel; 50 mm non-flammable mineral wool
 - Day and night lock, suitable for the insertion of a Euro profile cylinder, with indoor and outdoor door handle
 - Plate hinges, attached with flush M8 bolts
 - Finishing frame on the inside, coordinated with the thickness of the sandwich panel; flange width 60 mm, complete with hole pattern, \varnothing 6.5 mm, centre-to-centre approx. 300 mm
- Conservation:
 - Frame and counter frame, powder coating RAL 9005
 - Door leaf RAL 7035
 - Hinges black
- Sonodamp door, fitted with a window (W 890 x H 800 mm) on request
- Noise-insulated window dimensions W 1086 x H 996 mm
- Recess dimension W 980 x H 890 mm
- Fitted with:
 - Built-in frame, flange width 60 mm, complete with hole pattern, \varnothing 8 mm, centre-to-centre approx. 300 mm
 - Window, dimensions W 890 x H 800 mm, made of layered safety glass, d = 6.0 mm, attached with the help of a pressure frame
 - Finishing frame on the inside, coordinated with the thickness of the sandwich panel; flange width 60 mm, complete with hole pattern, \varnothing 8 mm, centre-to-centre approx. 300 mm
- Conservation:
 - Frame and counter frame, powder coating RAL 9005

Application Housings, cabins, walls

Customisation Other versions (such as double doors) or conservation, dimensions and thicknesses deliverable on request

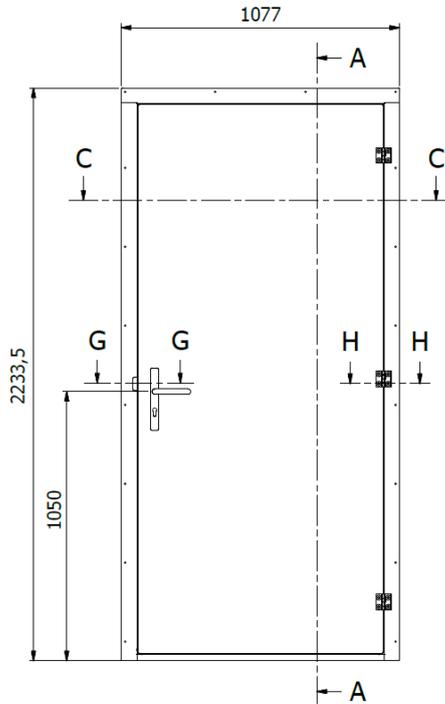

Sonodamp window

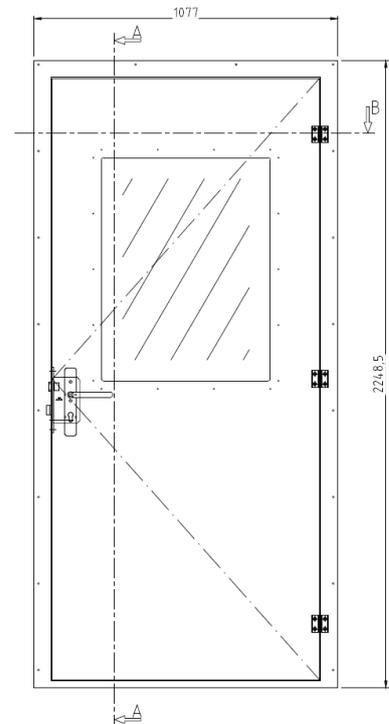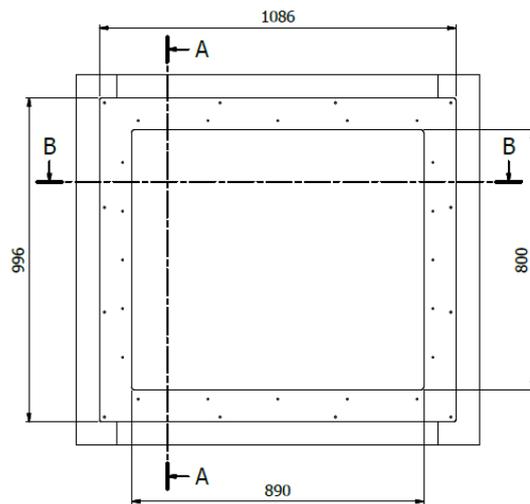

2016 version 01